


Installation Instructions

Product Code: NW 4330

Installation Schematic

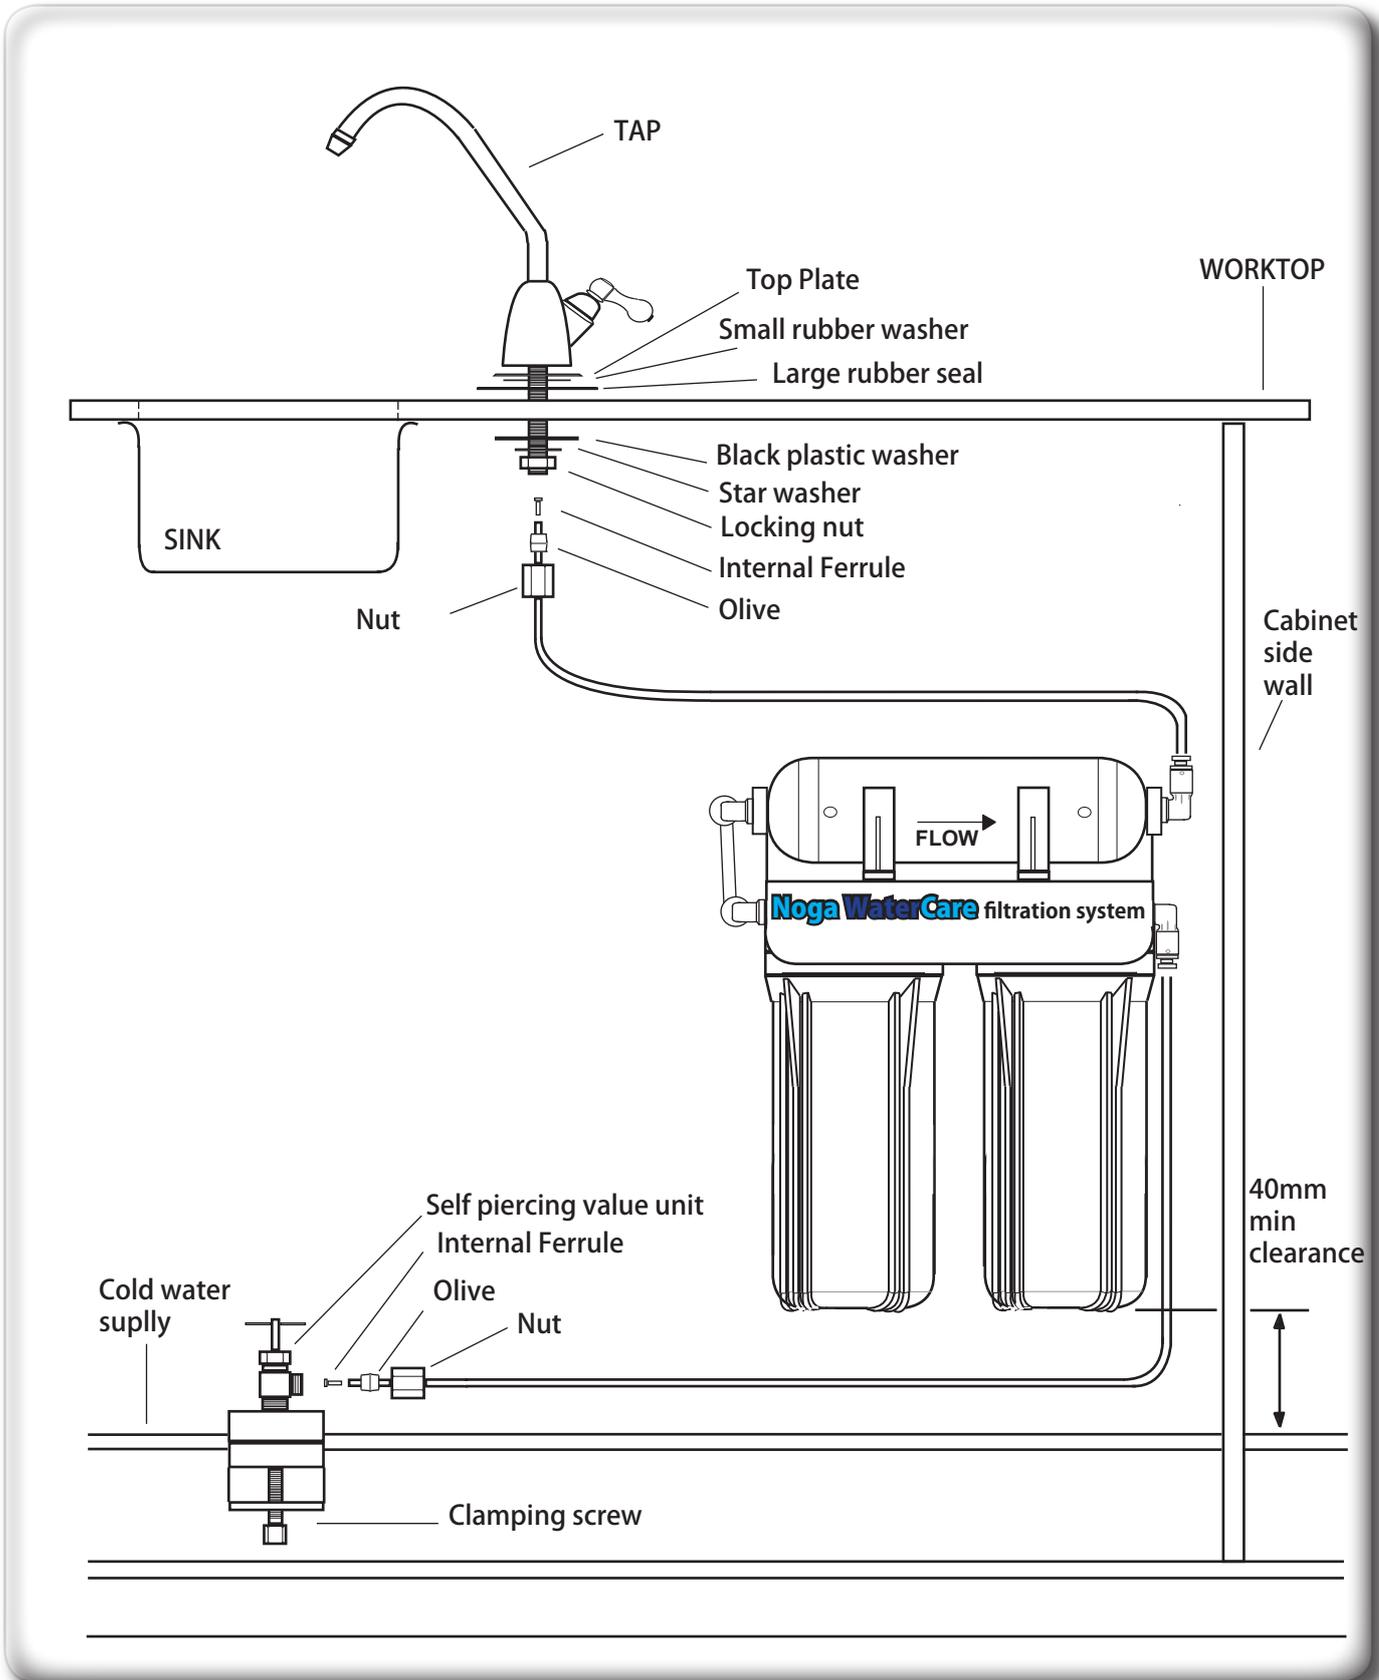

Installation Instructions

3 stage system NW 4330

Filter Unit Fitting

This system is supplied pre-assembled. To help with fitting to a wall or cupboard panel it is recommended that the Top Carbon Filter be removed by pulling it out from the 2 "C" clips. The 1/4" tube can be removed from the filter by depressing the flange on the fitting and pulling the pipe gently out.

Select a suitable place to mount the system. Ensure at least 40mm clearance between the bottom of the filter housings and any fixture below to allow for filter changing.

Offer the unit to the wall and mark the positions for the 2 bracket clamping screws. Use a 6mm masonry drill if using supplied plugs in solid wall or drill 3mm pilot hole in cupboard carcass if using the self-tapping screws supplied.

Screw bracket to wall and reconnect the 1/4" tube to the filter ensuring the flow direction marked on the filter runs right to left. Snap filter back into "C" clips.

Remove outer wrapping from filters taking care not to lose any sealing rings if fitted. Unscrew filter housings and check that the large "O" ring is seated evenly in the top of each filter housing. Place filters into housings and screw onto housing head in the following order: Left hand = Carbon Filter. Right hand = Sediment Filter (white) Carefully tighten filter housings with ring spanner provided. (See "**Filter Replacement**" for filter orientations)

Turn the water off.

Tap Unit Fitting


Select a suitable place to mount your swan neck tap either through the top of the sink or mounted onto a work surface, ensuring that the tap can discharge fully into your sink without flooding any work surfaces.

Then drill a 1/2" hole and mount the tap using the fittings supplied, make sure the tap is secure & rigid.

Connect the 1/4" pipe using the internal ferrule, olive & nut supplied to the tap and tighten. Connect the other end of the loose pipe to the port on the filter housing marked "OUT".

Self Piercing Valve Connection

Connect the pipe to the self-cutting valve using the internal ferrule, olive & nut supplied. Ensure the piercing pin is fully retracted in the Quick Fit Self Piercing Valve. Clamp the valve to the 15mm cold mains and run the 1/4" plastic pipe to the port on the filter housing marked "IN". Pierce the pipe by turning the 'T' bar fully in, and then fully out.

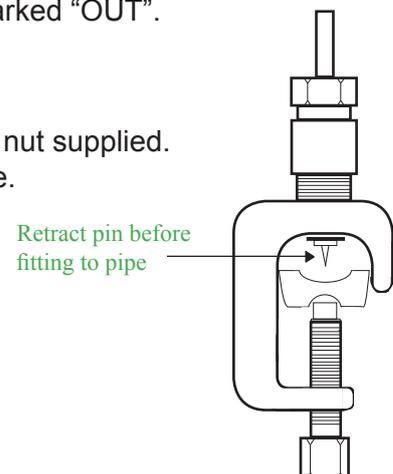

Installation Instructions



CAUTION:

The water supply to your system must be the cold mains, as hot water will severely damage your system.

Turn the water on at the mains and open the swan neck tap.

All of the air is expelled and the water will begin to flow.

You should allow the water to flow for approximately 10 minutes to remove any debris in the system.

WARNING:

When assembling these units if any leaks occur turn water off.

Tighten any seeping joints and then turn water back on.

Mains water pressure can vary, therefore it is essential to check for leaks daily during first week and periodically there after.

Filter Replacement

Filters should be replaced every 12000 litres or 12 months.

To replace filters, turn off water at mains and self-piercing valve.

Open Swan Neck Tap to release water pressure.

Carefully release housings with ring spanner supplied.

Replace filters and ensure large "O" ring in top of housing is seated evenly before re assembling the housings to the unit. Finally tighten with ring spanner.


Unclip top Carbon Filter from "C" clips. Pull out pipes from both elbow (press flange on connector to pull out pipe).

Unscrew elbow connectors from used filter and fit them to the new filter.


Apply PTFE to threads to ensure a water tight connection.

Note required flow and replace pipes and chip filter back into position.

Turn water on at main stopcock and valve. Check for leaks as above.

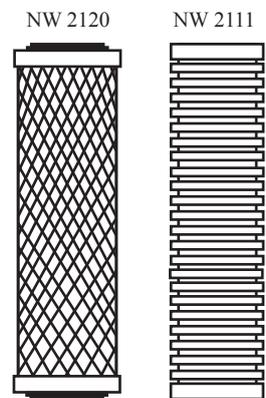

Filters can be fitted either way up

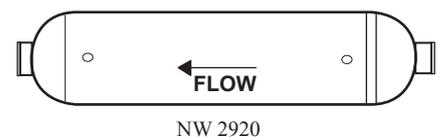

System Includes

2 X Filter Housings

1 X Two-Stage Bracket With Fixing Screws

1 X Sediment Filter 1 Micron NW 2111 (No sealing rings)

1 X Carbon Block Filter 5 Micron NW 2120 (2 sealing rings, 1 each end)

1 X Inline Activated Carbon Filter NW 2920 (No sealing rings)

1 X Ceramic Valve 1/4 Turn Swan Neck Tap

1 X Quick Fit Self-Cutting Valve

2 Metres of tube

1 X Key / Wrench

1 X Instruction Manual

If for any reason you experience a problem with this system.

Please call **NOGA WATERCARE TECHNICAL HELP LINE.**

On 0208 400 2020 Mon-Fri 9-5pm